
Installation Guide

Wheel Sensei
by smartertowing

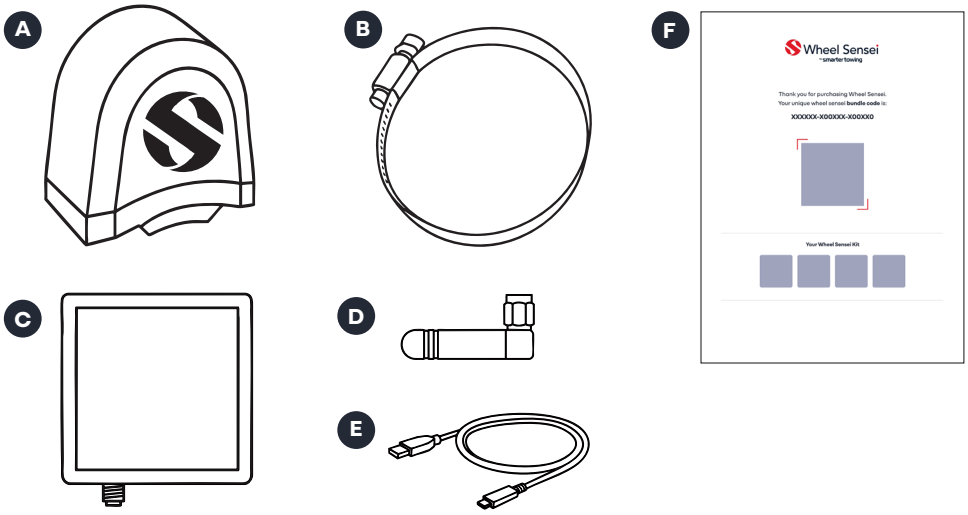

In the box

A. Wheel Sensei Devices
B. Ring Clamps
C. 1 x Data Box
D. 1 x Antenna
E. 1 x USB-C to USB-Cable
F. 1 x Bundle Code Sheet

What you'll need:


- A Flathead Screwdriver
- A Mobile Device

1 App Setup




1. Scan the QR code for the Smarter Towing App
2. Login or create a new account
3. Tap 'Add Vehicle' and follow the prompts
4. Go to 'Link vehicle' and select the Wheel Sensei icon
5. Scan the QR code on your bundle code sheet (F) with the app and follow the prompts to complete app setup

2 Device Setup

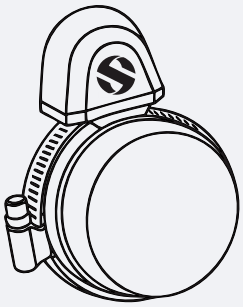

6. Pick up a Wheel Sensei device (A) and give it a quick shake. It will then appear in your app.
7. Undo one of the ring clamps (B) and thread it through through the gap at the bottom of the device.
8. Place the device onto the assigned wheel hub (refer to the bundle sheet or app for the correct location
9. Make sure the Wheel Sensei logo faces outward.
10. Connect the clamp ends together.
11. Use a flathead screwdriver to tighten the clamp securely.
12. Repeat steps 6-11 for each remaining wheel until all devices are attached.

3 Data Box Setup



13. Screw the antenna (D) onto the data box (C) and tighten it securely.
14. Plug the USB-C cable (E) into the data box.
15. Connect the other end of the cable to your vehicle's USB outlet.
16. Check the lights:
    - Purple light on = the data box has power.
    - Flashing blue light = data is being received
17. You're ready to go - **A to B, stress free.**

For more support, including information on the Smarter Towing app and vehicle connection, scan the QR code or visit: **smartertowing.com/support**